

ABÉLIA



MATERIALS

Bracket: mechanically welded aluminum


SURFACE TREATMENT

RAL hues, or structured paint optional
Baked (220°C) polyester powder coating

BRACKET/COLUMN JUNCTION

Adaptable bracket on Ø60 to 76mm (central Ø48.5mm minimum) columns

Sealing with column by integrated bracket cup
Fastening by pressure screws on the column



- A must be between 20 and 130mm
- B must be between 165 and 480mm

10° TILT (5° AVAILABLE ON REQUEST)

BRACKET/LUMINAIRE JUNCTION

Ø60mm covering sleeve mounting


MURAL BRACKET MOUNTING

2 Ø14mm holes, inter-axial distance 220mm


OFFSET LIGHT BRACKET MOUNTING

2 supplied M12 screws, inter-axial distance 220mm


	L mm	WEIGHT kg	S C X m ²
SINGLE LIGHT	500	5	0,10
	750	5,8	0,12
	1000	6,6	0,13
	1200	7,3	0,14
DOUBLE LIGHTS	750	7,5	0,16
	1000	9,1	0,19
	1200	10,2	0,23
MURAL	200	1	0,02
	500	1,7	0,05
OFFSET LIGHT	200	1	0,02
	500	1,7	0,05

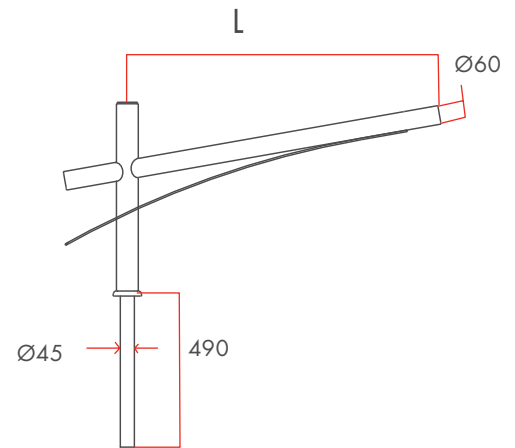

• ABÉLIA SINGLE LIGHT

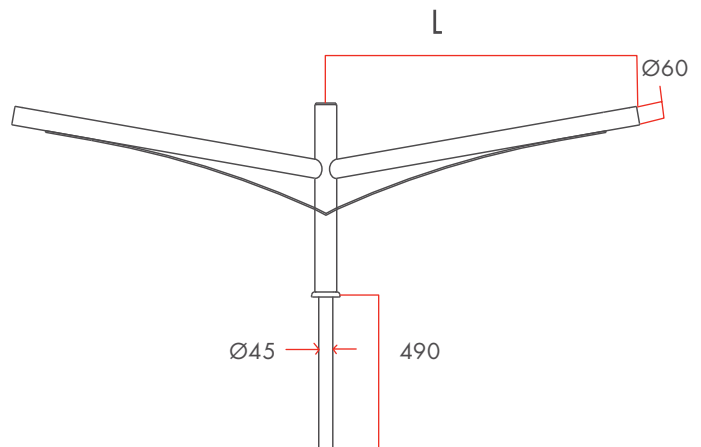

• ABÉLIA DOUBLE LIGHTS

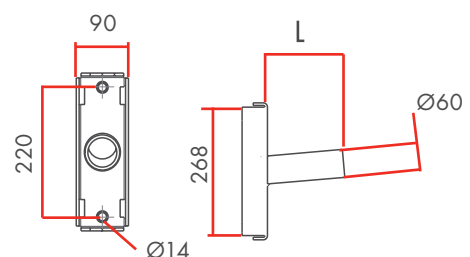

• ABÉLIA WALL AND OFFSET LIGHTS