

BEYNALIT



MATERIALS

Bracket: mechanically welded aluminum


SURFACE TREATMENT

RAL hues, or structured paint optional
Baked (220°C) polyester powder coating

BRACKET/COLUMN JUNCTION

Adaptable bracket on Ø60 to 76mm (central Ø48.5mm minimum) columns

Sealing with column by integrated bracket cup
Fastening by pressure screws on the column



- A must be between 20 and 130 mm.
- B must be between 165 and 480 mm.

10° LUMINAIRE TILT (15° BRACKET ARM)

BRACKET/LUMINAIRE JUNCTION

70x40mm on-sliding sleeve mounting

Bracket designed for the ECLISSE luminaire

MURAL BRACKET MOUNTING

2 Ø14mm holes


Length up to 750mm, inter-axial distance 220mm

Length 1200mm, inter-axial distance 260mm


OFFSET LIGHT BRACKET MOUNTING

2 supplied M12 screws, inter-axial distance 220mm


	L mm	WEIGHT kg	S C X m ²
SINGLE LIGHT	500	3,7	0,06
	750	4,3	0,08
	1200	6,3	0,14
DOUBLE LIGHTS	750	5,8	0,12
	1200	8,6	0,20
MURAL	200	1	0,02
	750	2,7	0,08
	1200	4,3	0,12
OFFSET LIGHT	200	1	0,02
	750	2,7	0,08

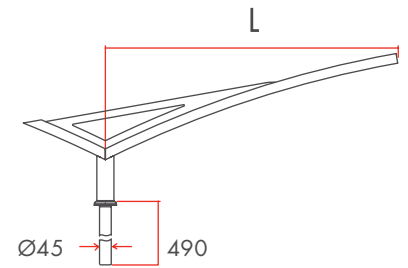


• BEYNALIT SINGLE LIGHT

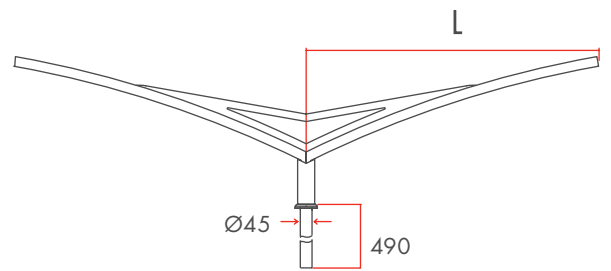

• BEYNALIT DOUBLE LIGHTS

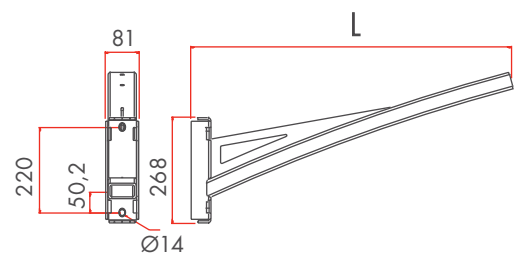

• BEYNALIT WALL AND OFFSET LIGHTS 750 ET 1200

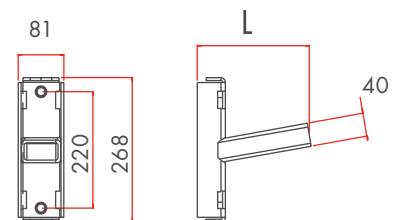

• BEYNALIT WALL AND OFFSET LIGHTS 200