

CAPUCINE



MATERIALS

Bracket: mechanically welded aluminum

SURFACE TREATMENT


RAL hues, or structured paint optional
Baked (220°C) polyester powder coating

BRACKET/COLUMN JUNCTION

Adaptable bracket solely on Ø60mm (interior Ø48.5mm minimum) columns

Sealing with column by joint

Fastening by pressure screws on the column



- A must be between 20 and 130 mm.
- B must be between 165 and 290 mm.

10° TILT

BRACKET/LUMINAIRE JUNCTION

Direct mounting using 4 M8 stainless steel screws + a lock-nut , section 80 x 35 mm

Bracket designed for the SOLSTIS luminaire


MURAL BRACKET MOUNTING

2 Ø14mm holes, inter-axial distance 280mm


OFFSET LIGHT BRACKET MOUNTING

2 supplied M12 screws, inter-axial distance 280mm


	L mm	WEIGHT kg	S C X m ²
SINGLE LIGHT	750	4,9	0,07
	1000	5,5	0,08
	1200	5,8	0,10
DOUBLE LIGHTS	750	9	0,13
	1000	10,2	0,15
	1200	10,8	0,17
MURAL	200	1,3	0,03
	500	2,0	0,05
OFFSET LIGHT	750	2,7	0,07
	200	1,3	0,03
	500	2,0	0,05
750	2,7	0,07	

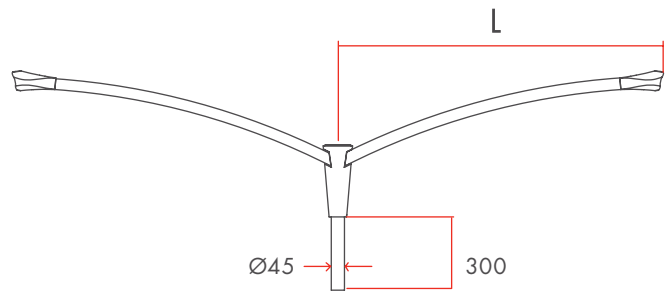

• CAPUCINE DOUBLE LIGHTS

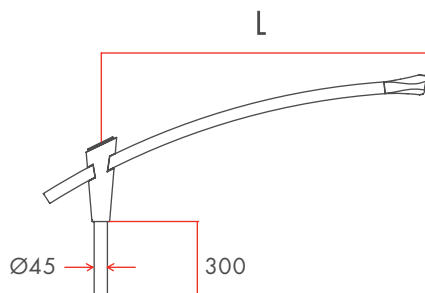

• CAPUCINE SINGLE LIGHT

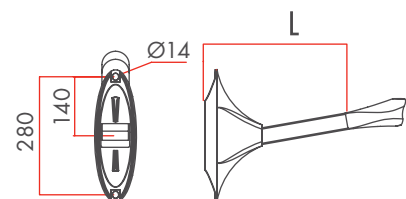

• CAPUCINE WALL AND OFFSET LIGHTS