

CHANDELIER



MATERIALS

Bracket: mechanically welded aluminum

SURFACE TREATMENT

RAL hues, or structured paint optional


Baked (220°C) polyester powder coating

BRACKET/COLUMN JUNCTION

Adaptable bracket solely on Ø60 to 76mm (interior Ø48.5mm minimum) columns

Sealing with column by integrated bracket cup

Fastening by pressure screws on the column



- A must be between 20 and 130 mm.
- B must be between 165 and 480 mm.

BRACKET/LUMINAIRE JUNCTION

Ø60mm covering sleeve mounting


MURAL BRACKET MOUNTING

2 trous Ø14 mm, inter-axial distance 160 mm.


OFFSET LIGHT BRACKET MOUNTING

2 supplied M12 screws, inter-axial distance 160mm


	L mm	WEIGHT kg	S C X m ²
SINGLE LIGHT	500 750	3,1	0,08
DOUBLE LIGHTS	500 750	4	0,10
MURAL	500	2,3	0,07
	750	2,9	0,08
OFFSET LIGHT	500	2,3	0,07
	750	2,9	0,08

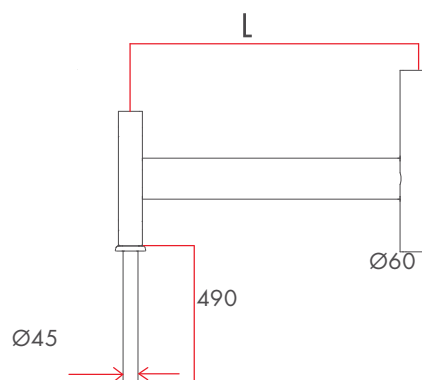

• CHANDELIER SINGLE LIGHT

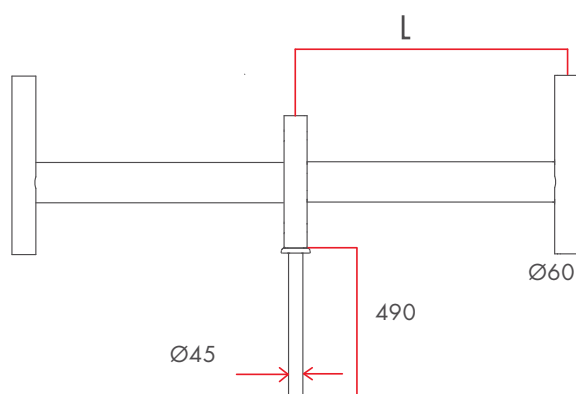

• CHANDELIER DOUBLE LIGHTS

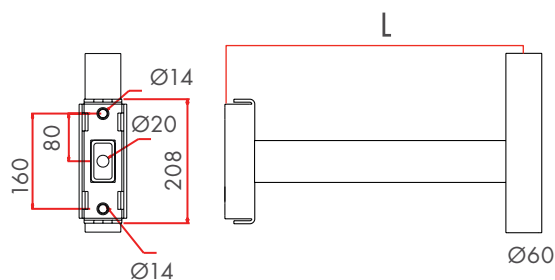

• CHANDELIER WALL AND OFFSET LIGHTS