

E L B O



MATERIALS


Bracket for single lights made in hot dipped galvanized steel
 Brackets for offset and wall lights in mechanically welded aluminum

SURFACE TREATMENT

RAL hues, or structured paint optional
 Baked (220°C) polyester powder coating

BRACKET/COLUMN JUNCTION

Adaptable bracket solely on Ø60mm (central Ø50mm minimum) columns
 Sealing with column by integrated bracket cup
 Fastening by pressure screws on the column



- A must be between 20 and 130 mm.
- B must be between 165 and 490 mm.

BRACKET/LUMINAIRE JUNCTION

Top or lateral Ø60-62mm mounting


Bracket designed for the TAGO luminaire

MURAL BRACKET MOUNTING


2 Ø14mm holes, inter-axial distance 220mm

OFFSET LIGHT MOUNTING BRACKET

2 supplied M12 screws, inter-axial distance 220mm

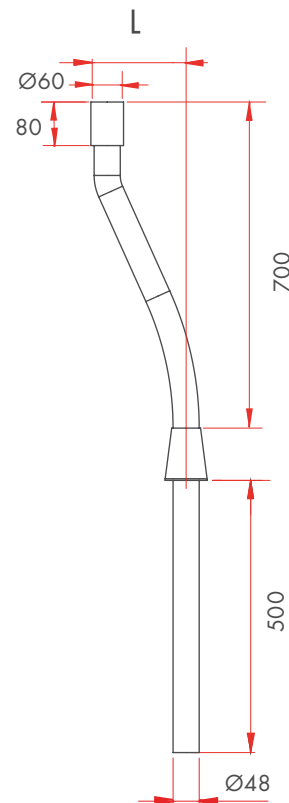

• ELBO SINGLE LIGHT

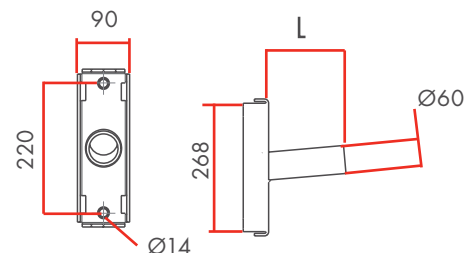

• ELBO WALL AND OFFSET LIGHTS

	L mm	WEIGHT kg	S C X m ²
SINGLE LIGHT	145	4,5	0,04
MURAL	200	1	0,03
OFFSET LIGHT	200	1	0,03