

EYMARINE



MATERIALS

Bracket: mechanically welded aluminum

SURFACE TREATMENT


RAL hues, or structured paint optional
Baked (220°C) polyester powder coating

BRACKET/COLUMN JUNCTION

Adaptable bracket on Ø60 to 76mm (interior Ø48.5mm minimum) columns

Sealing with column by integrated bracket cup

Fastening by pressure screws on the column



- A must be between 20 and 130 mm.
- B must be between 165 and 480 mm.

10° TILT

BRACKET/LUMINAIRE JUNCTION

Direct mounting using 4 M8 stainless steel screws + locknut
Section 80x35mm

Bracket designed for the SOLSTIS luminaire

MURAL BRACKET MOUNTING


2 Ø14mm holes

Inter-axial distance 220mm


OFFSET LIGHT BRACKET MOUNTING

2 supplied M12 screws, inter-axial distance 220mm


	L mm	WEIGHT kg	S C X m ²
SINGLE LIGHT	750	4,0	0,10
	1200	6,0	0,16
DOUBLE LIGHTS	750	5,5	0,14
	1200	8,5	0,22
MURAL	200	1,3	0,03
	750	2,5	0,08
	1250	4,5	0,12
OFFSET LIGHT	200	1,3	0,03

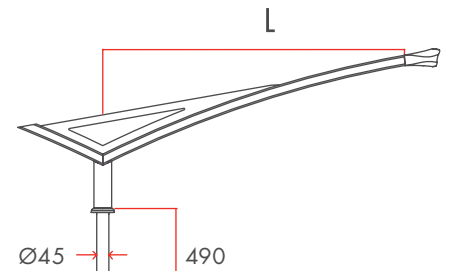


• EYMARINE SINGLE LIGHT

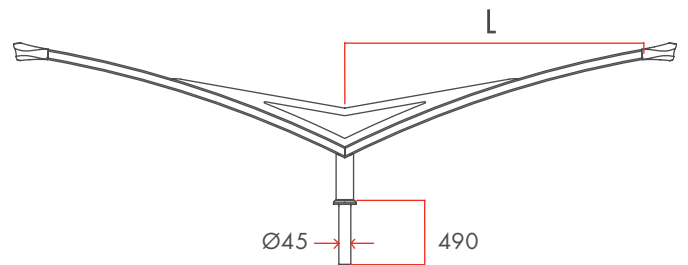

• EYMARINE DOUBLE LIGHTS

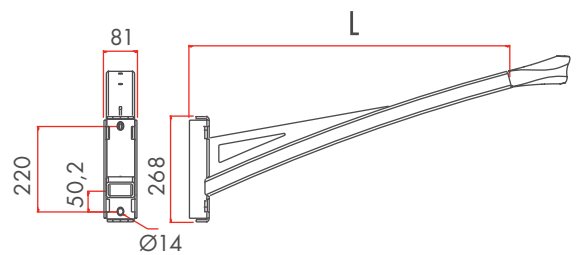

• EYMARINE WALL AND OFFSET LIGHT 750 ET 1250

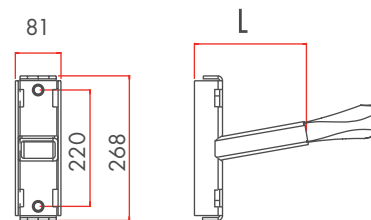

• EYMARINE WALL AND OFFSET LIGHT 200