

# IBISS



## MATERIALS

Bracket: mechanically welded aluminum

## SURFACE TREATMENT


RAL hues, or structured paint optional  
Baked (220°C) polyester powder coating

## BRACKET/COLUMN JUNCTION

Adaptable bracket solely on Ø60mm (interior Ø48.5mm minimum) columns

Sealing with column by joint

Fastening by pressure screws on the column



- A must be between 20 and 130 mm.
- B must be between 165 and 290 mm.

10° TILT

## BRACKET/LUMINAIRE JUNCTION

Ø60mm diameter covering sleeve mounting


## MURAL BRACKET MOUNTING

2 Ø14mm holes, inter-axial distance 260mm


## OFFSET LIGHT BRACKET MOUNTING

2 supplied M12 screws, inter-axial distance 260mm


	L mm	WEIGHT kg	S C X m <sup>2</sup>
SINGLE LIGHT	750	3,8	0,09
	1000	4,3	0,11
	1200	4,8	0,12
DOUBLE LIGHTS	750	5,0	0,18
	1000	6,1	0,21
	1200	7	0,24
MURAL	300	1,4	0,03
	500	1,9	0,05
	750	2,5	0,07
OFFSET LIGHT	300	1,4	0,03
	500	1,9	0,05
	750	2,5	0,07

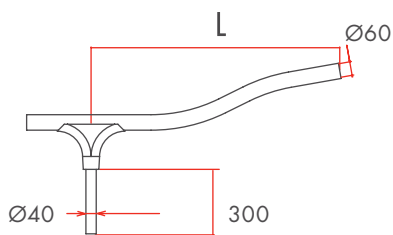

• IBISS SINGLE LIGHT

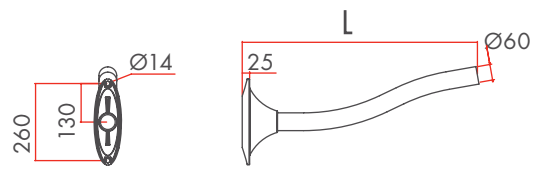

• IBISS WALL AND OFFSET LIGHTS 750

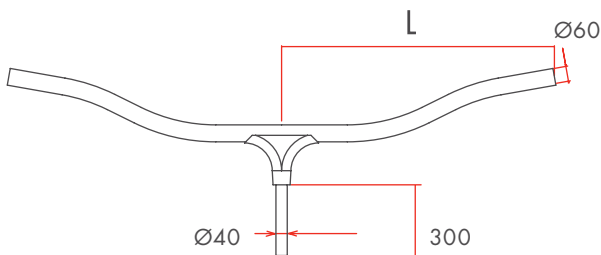

• IBISS DOUBLE LIGHTS



• IBISS WALL AND OFFSET LIGHTS 300 ET 500