

KÉALIT



MATERIALS

Bracket: mechanically welded aluminum

SURFACE TREATMENT


RAL hues, or structured paint optional
Baked (220°C) polyester powder coating

BRACKET/COLUMN JUNCTION

Adaptable bracket on Ø60 to 76mm (interior Ø48.5mm minimum) columns

Sealing with column by integrated bracket cup

Fastening by pressure screws on the column



- A must be between, 20 and 130 mm.
- B must be between 165 and 480 mm.

10° LUMINAIRE TILT (15° BRACKET ARM)

BRACKET/LUMINAIRE JUNCTION

Dedicated sleeve mounting entering 70 x 40mm

Bracket designed for the ECLISSE luminaire

MURAL BRACKET MOUNTING

2 Ø14mm diameter holes

Inter-axial distance 220mm for 200 mm length

Inter-axial distance 200 for 750mm and 1200mm length


BRACKET WITH OFFSET LIGHTS MOUNTING

2 supplied M12 screws


Inter-axial distance 220mm for 200 mm length

Inter-axial distance 200 for 750mm and 1200mm length


	L mm	WEIGHT kg	S C X m ²
SINGLE LIGHT	750	4,5	0,05
	1200	6,0	0,08
DOUBLE LIGHTS	750	6,5	0,10
	1200	10,0	0,16
MURAL	200	0,9	0,02
	750	3,5	0,05
	1200	5,0	0,08
OFFSET LIGHT	200	0,9	0,02
	750	3,5	0,05

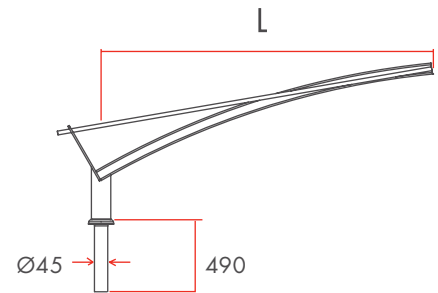


• KÉALIT SINGLE LIGHT

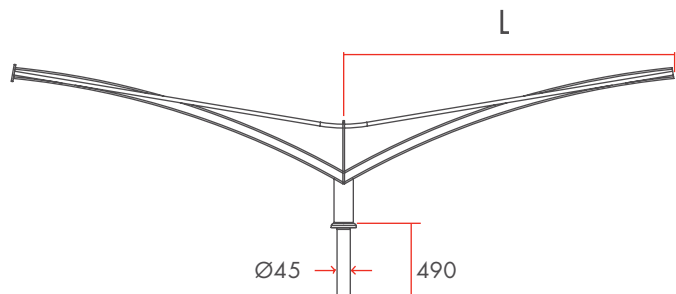

• KÉALIT DOUBLE LIGHTS

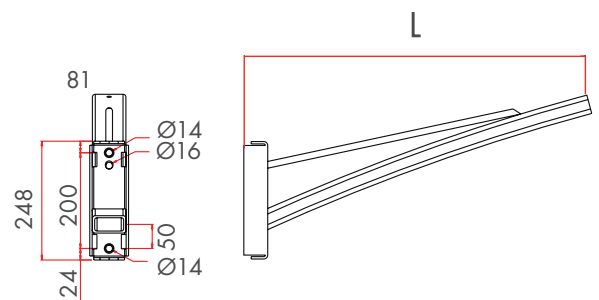

• KÉALIT MURAL 750 AND 1200

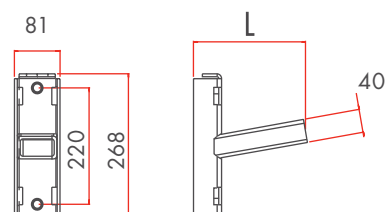

• KEALIT WALL AND OFFSET 200