

# EYMARINE



## MATERIALS

Bracket: mechanically welded aluminum

## SURFACE TREATMENT


RAL hues, or structured paint optional  
Baked (220°C) polyester powder coating

## BRACKET/COLUMN JUNCTION

Adaptable bracket on  $\varnothing 60$  to 76mm (interior  $\varnothing 48.5$ mm minimum) columns

Sealing with column by integrated bracket cup

Fastening by pressure screws on the column



- A must be between 20 and 130 mm.
- B must be between 165 and 480 mm.

15° TILT

## BRACKET/LUMINAIRE JUNCTION

Direct mounting using 4 M8 stainless steel screws + locknut  
Section 80x35mm

**Bracket designed for the SOLSTIS luminaire**

## MURAL BRACKET MOUNTING

2  $\varnothing 14$ mm holes


Inter-axial distance E=200mm for length 750

Inter-axial distance E=260mm for length 1250


## WALL AND OFFSET LIGHT BRACKET MOUNTING 200

2 supplied M12 screws, inter-axial distance 220mm


	L mm	WEIGHT kg	S C X m <sup>2</sup>
<b>SINGLE LIGHT</b>	750	4,0	0,10
	1200	6,0	0,16
<b>DOUBLE LIGHTS</b>	750	5,5	0,14
	1200	8,5	0,22
<b>MURAL</b>	200	1,3	0,03
	750	2,5	0,08
	1250	4,5	0,12
<b>OFFSET LIGHT</b>	200	1,3	0,03

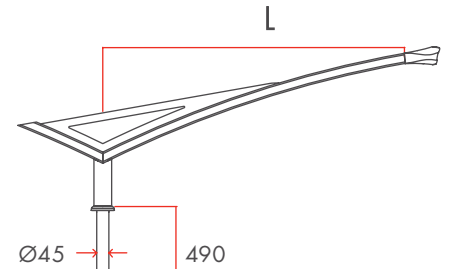


• EYMARINE SINGLE LIGHT

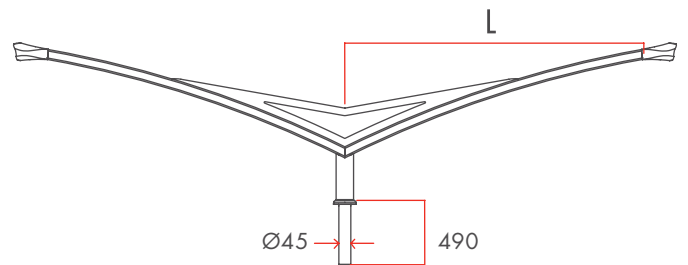

• EYMARINE DOUBLE LIGHTS

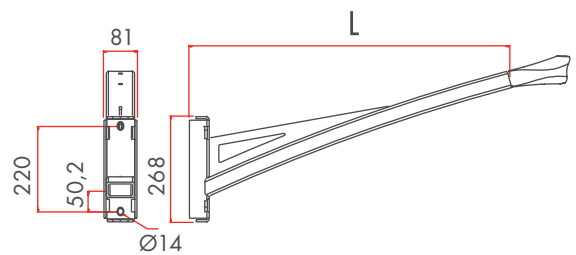

• EYMARINE WALL AND OFFSET LIGHT 750 ET 1250

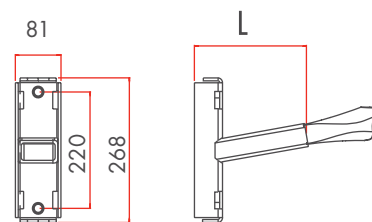

• EYMARINE WALL AND OFFSET LIGHT 200