

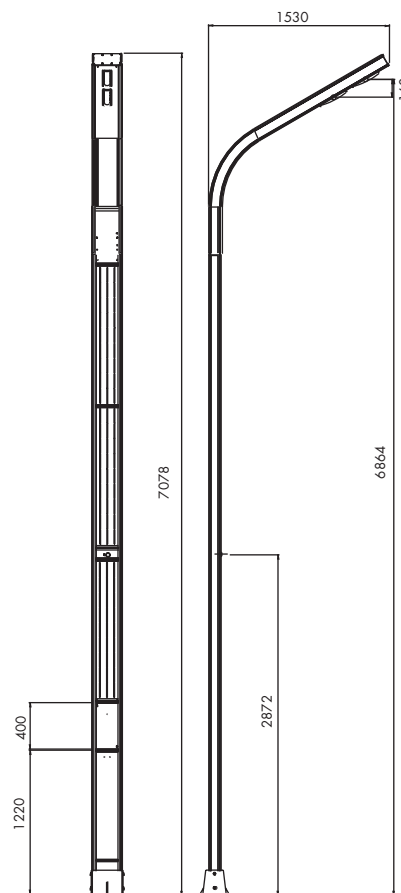



OVERALL INFORMATION	
Dimensions	H 7000 x W 250 x D 1530
Luminaire weight without batteries	150 kg
Material and paint treatment	Aluminum pole and arm - Powder paint (seafront and seaside on request)
Max Power	38W for 1 module
Nominal power	20W for 1 module
Indication for the implementation of a surge arrester	Category Electronic Equipment > IV
LED	
Lifetime	L80 > 50 000 hours @700mA @Tq=25°C L70 > 60 000 hours @500mA @Ta=55°C
Manufacturer	LUMILEDS
Lumen/Watt efficiency	152 lm/W max. @350mA @Tj = 85°C - Bin V @4000K
Color T°:	3000K and 4000K - CRI 70
LIGHTING	
Outgoing nominal flow	2173 lm@4000K for 1 module
Optical performance	89%
Luminaire nominal efficiency	109 lm/W @4000K
Optics	ASYM 2.2 pathway type as standard
BATTERY	
Battery weight	3 x 3.5Kg
Technology	LiFePo4
Total power	960Wh
Voltage / Capacity	3 x 3.2V/100Ah
Nominal lifetime	5 years
PHOTOVOLTAIC PANELS	
Number of panels - Technology	7 - Monocrystalline
Unit power	35W
Voltage	13,6V
IK panels	IK08
PROGRAMMING	
	WiFi connection with the street lamp
WIRELESS	
2 LIGHTING MODES	Zigbee communication (radio) : configure 1 lamp and send parameters to all the lamps assigned to the same group. - Autonomous : lighting at twilight and turn-off at sunrise. Three time periods (beginning, middle, end of night) are available to set lighting power. - Schedule : lighting power is defined hourly.
SMART DIMMING	Allow light power to last all night. Dimming is self-managed according to the charge of the battery.
DETECT	Activate lighting, create lighting path, allow group synchronization after detection by the motion detector.
ON/OFF	Specific command to have direct control over lighting.
ELECTRONIC CARD	
Battery Management (BMS)	Yes
Solar Charger	Yes
Communication	WiFi and ZIGBEE
Date and time setting	by GPS
Movement detector	High-frequency, detection up to 10m




LED modules layout Side view



Photometric curves

ASYM 2-2 optics

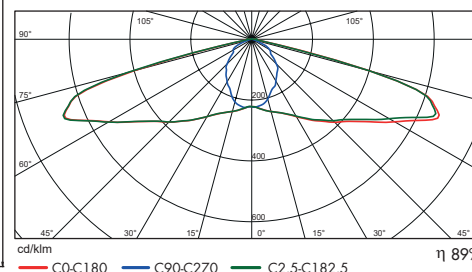

COMPLIANCE

Standards and certifications	EN 60598-1 / 2-3 Lighting: General requirements and tests - Public lighting luminaires EN 62722-2-1 Performance of luminaires: Requirements for LED luminaires UTE C15-712-2 Practical guide - Stand-alone photovoltaic installations not connected to the public distribution network with battery storage EN 40-6 Specification for aluminum public lighting candelabra
------------------------------	--

OPERATING TEMPERATURE

	Operating temperature range: -20°C to 60°C Nominal temperature range: 0° to 45°C Outside these ranges, the batteries must be buried.
--	--

INSTALLATION

Installation mean	Sealing rods not provided, specific according to the wind area See installation instructions
Battery location	Inside the pole as standard, buried according to the temperature of use

AUTONOMY

	According to location and orientation of the luminaire - See table of use
--	---