



PAGODE-LED



• RANGE

No variation - LED 3000K

	15W350 1725 lm	25W530 2528 lm	31W700 3228 lm	45W1000 4361 lm
	4 LED	4 LED	4 LED	4 LED
Input power	19W	30W	38W	56W

SMART LUM Programmable - LED 3000K

	15W350 1725 lm	25W530 2528 lm	31W700 3228 lm	45W1000 4361 lm
	4 LED	4 LED	4 LED	4 LED
Input power	19W	30W	38W	56W

Life span = B10 L80 ≥ 60 000h @Ts = 75°C - @700 mA
Less than 10% of LED have an outgoing flux < 80% of the initial flux at 60 000h.

OPTICS:

Square type lighting (SYM 7)

MATERIALS - SURFACE TREATMENT

Base and top: die-cast aluminum
Hubcap: spun aluminum
Bowl: PMMA impact resistant IK10
Baked (220°C) polyester powder coating
RAL hues or other structured paint optional
Standard white-colored inner side hub cap
Paint treatment specifically for coast/shoreline p. 279.

MOUNTING

Mounting on column Ø60mm maxi, 70mm long.
Luminaire base Ø89mm.
Stainless steel screws and bolts.

INSTALLATION/MAINTENANCE


Driver access underneath by unscrewing 6-hexagon socket head captive screws.
6 available meter pre-cabled luminaire (flexible cable 2x 1.5mm²).
Field replaceable power.
Surge arrester between phase neutral and earth (L-N-G) 10kV-5kA required at the foot of the column.
Conditions of use p.262 and of maintenance p.278.

• SMART LUM

Adjusted output power			Point to point control		Autonomous group with pilot wire	Group management	Luminous points' management
P-adjust	F-Constant	Detect	Prog BP6	Prog Cycles	Prog Switch with Detect	VAR	Dali
●	●	●	●	●	●	—	●



• DIMENSIONS




• CHOICE OF CANOPY

Curved or flat

• WEIGHT WITHOUT DRIVER/SURFACE SCX : 8,7kg/0,09 m²

• POLAR CURVES

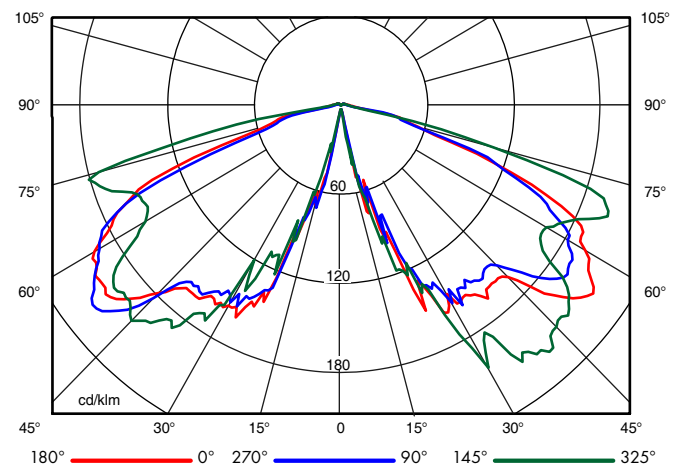

OPTION

For a communicating system, dual pre-cabling dedicated to communication is necessary (flexible cable 5Gx1.5mm²).
Flow shield.
Surge arrester placed in a connexion box at the foot of the column p.284-286.