

PAGODINA-LED



• RANGE

No variation - LED 3000K

| | | | | |
|-------------|-------------------|-------------------|-------------------|--------------------|
| | 15W350 1725 lm | 25W530 2528 lm | 31W700 3228 lm | 45W1000 4361 lm |
| | 4 LED | 4 LED | 4 LED | 4 LED |
| Input power | 19W | 30W | 38W | 56W |

SMART LUM Programmable - LED 3000K

| | | | | |
|-------------|-------------------|-------------------|-------------------|--------------------|
| | 15W350 1725 lm | 25W530 2528 lm | 31W700 3228 lm | 45W1000 4361 lm |
| | 4 LED | 4 LED | 4 LED | 4 LED |
| Input power | 19W | 30W | 38W | 56W |

Life span = B10 L80 ≥ 60 000h @Ts = 75°C - @700 mA
Less than 10% of LED have an outgoing flux < 80% of the initial flux at 60 000h.

OPTICS:

Square type lighting (SYM 7)

MATERIALS - SURFACE TREATMENT

Base and top: die-cast aluminum
Hubcap: spun aluminum
Bowl: PMMA impact resistant IK10
Baked (220°C) polyester powder coating
RAL hues or other structured paint optional
Standard white-colored inner side hub cap
Paint treatment specifically for coast/shoreline p. 279.

MOUNTING

Mounting on column Ø60mm maxi, 70mm long.
Luminaire base Ø89mm.
Stainless steel screws and bolts.

INSTALLATION/MAINTENANCE


Driver access underneath by unscrewing 6-hexagon socket head captive screws.
6 available meter pre-cabled luminaire (flexible cable 2x 1.5mm²).
Field replaceable power.
Surge arrester between phase neutral and earth (L-N-G) 10kV-5kA required at the foot of the column.
Conditions of use p.262 and of maintenance p.278.

• SMART LUM

| Adjusted output power | | | Point to point control | | Autonomous group with pilot wire | Group management | Luminous points' management |
|-----------------------|------------|--------|------------------------|-------------|----------------------------------|------------------|-----------------------------|
| | | | | | | | |
| P-adjust | F-Constant | Detect | Prog BP6 | Prog Cycles | Prog Switch with Detect | VAR | Dali |
| ● | ● | ● | ● | ● | ● | — | ● |




• DIMENSIONS



• WEIGHT WITHOUT DRIVER/SURFACE SCX : 7,3 kg/0,07 m²

• POLAR CURVES

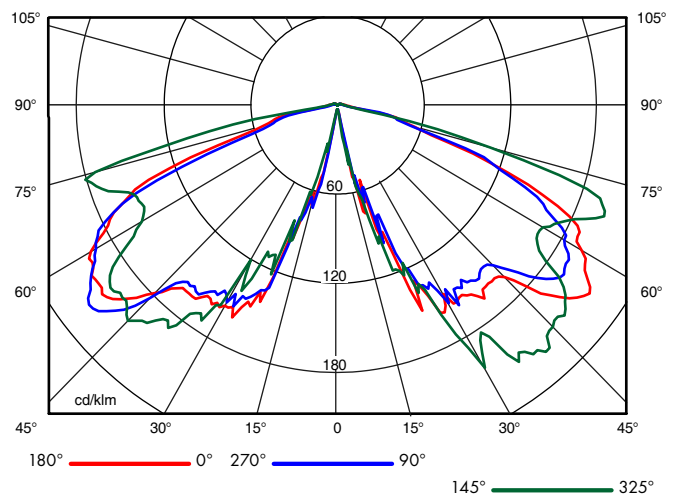

OPTION

For a communicating system, dual pre-cabling dedicated to communication is necessary (flexible cable 5Gx1.5mm²).
Flow shield.
Surge arrester placed in a connexion box at the foot of the column p.284-286.